
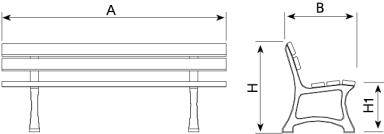


Bench with ductile iron legs treated with Ferrus, a protective process that guarantees high resistance to corrosion.



Ref.	A	B	H	H1
UM374	1800	630	770	445
UM374B	1800	500	-	445

The Ferrus treatment consists of three layers applied after shot cleaning all impurities: an electrolytic bath, an epoxy coating and a forge black polyester paint coating.

Four 110 x 35 mm tropical wood boards treated with Lignus, a fungicide, insecticide and waterproof agent. Mahogany colour finish.

Stainless steel screws.

Recommended anchoring: by means of M10 expansion bolts depending on the surface and the project.



The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.